

-
-
-
- - AgentApple IDAdmin
 -
 - mac7
 - 1.[]
 - 2.
 - 3.production
 - 4.iOS DistributionApp StoreEnterprise
 - 5.root
 - 6.BobbyXcode
 - 7.Mac
 - 8.5
 - =:xxxxxxxx
 - 9.
 - 10.p12
- - 0.12
 - 1.provisioning profilesproduction
 - 2.app
 - 3.
 - 4.mobileprovision
- - QA

1. App StoreApp12App
2. mobileprovisionApp

1. "iOS Developer Program"
2. iOS[IOS])
3. Macmac
4. Xcode


- 1.
2. App Store
3. Enterprise

Enterprise

EnterpriseApp Store ConnectEnterprise

Example co. Ltd

Apple Developer Enterprise Program

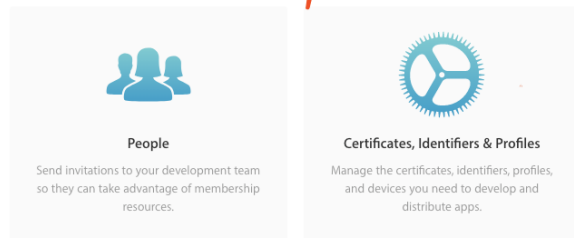

AgentApple IDAdmin

AgentAppleIDAdmin

6


AdminBobby6BobbyBobbyAppleID


.cer

.p12XCode46~10

mac7


1.[]

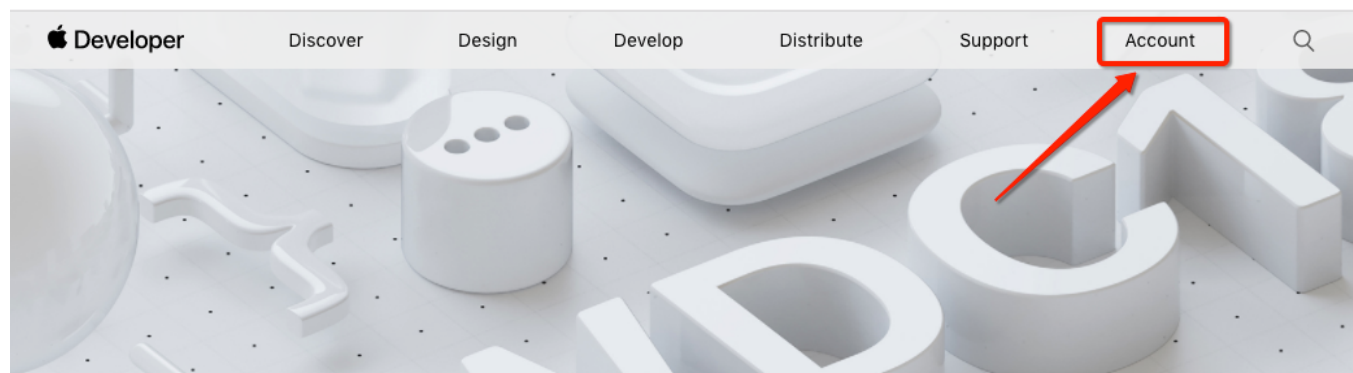

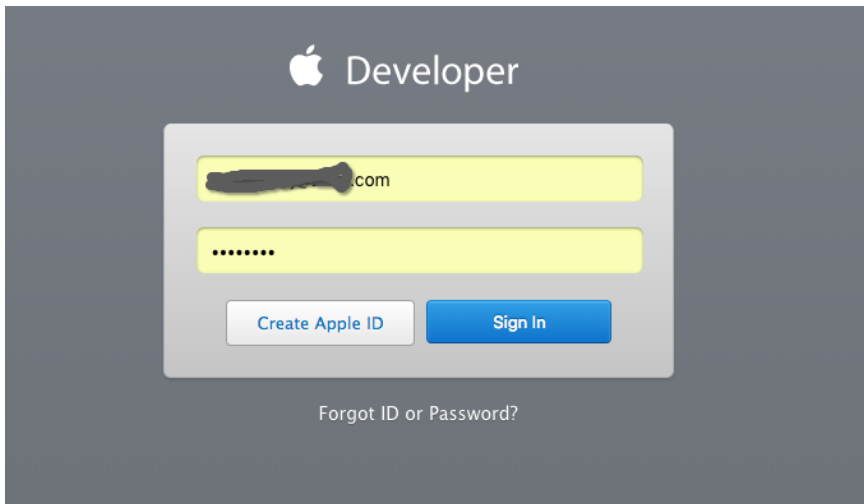


2.

Apple Developer Enterprise Program

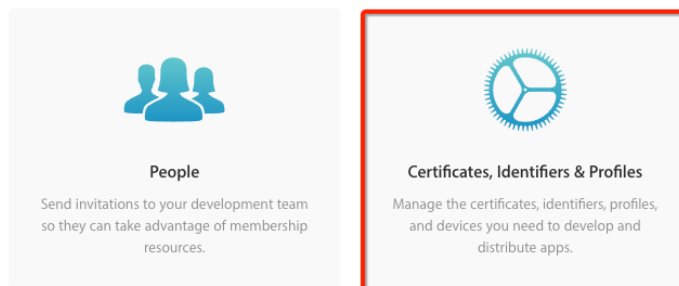


3. production

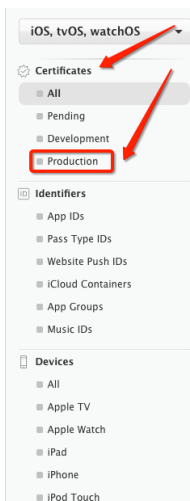

4.iOS DistributionApp StoreEnterprise



Download

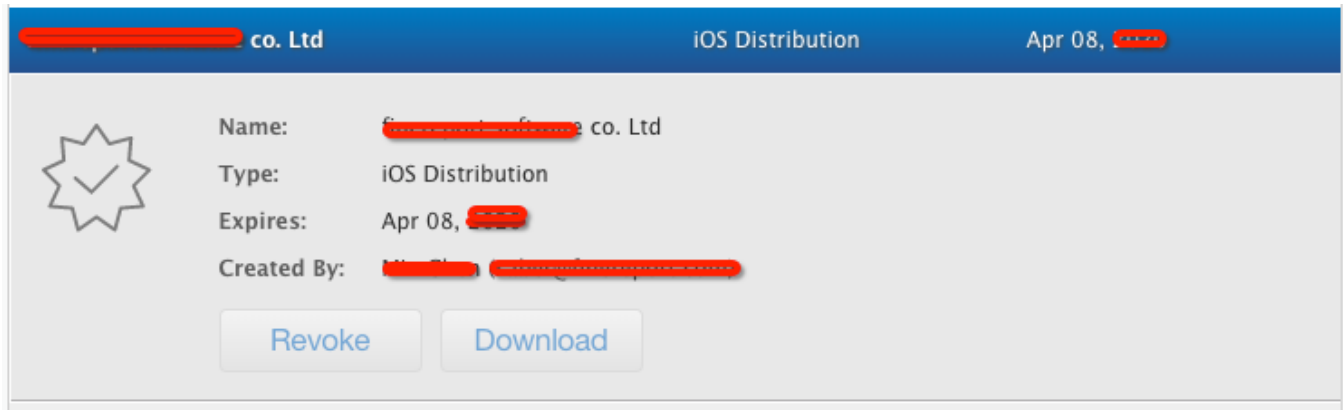

5.root


Mac



p126


-----2-----

6.BobbyXcode

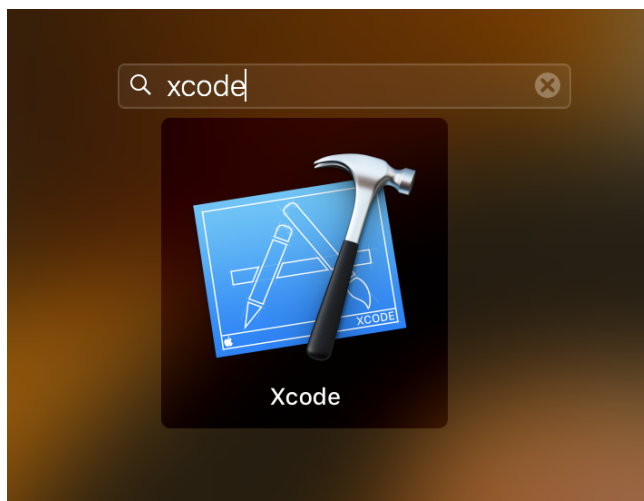


=XCode=Preferences=Bobby


BobbyAgentAgentAdmin

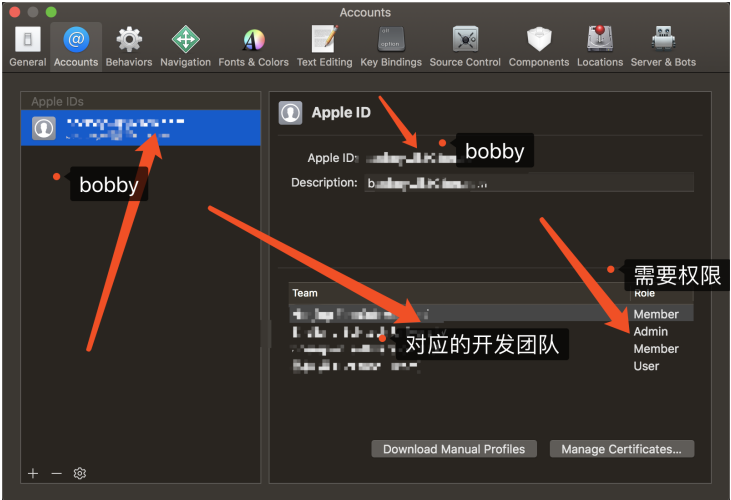

Manage Certificates

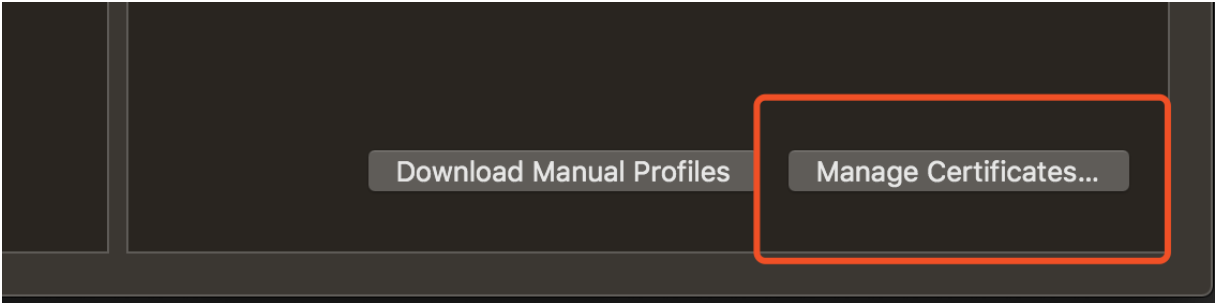

+iOS Distribution

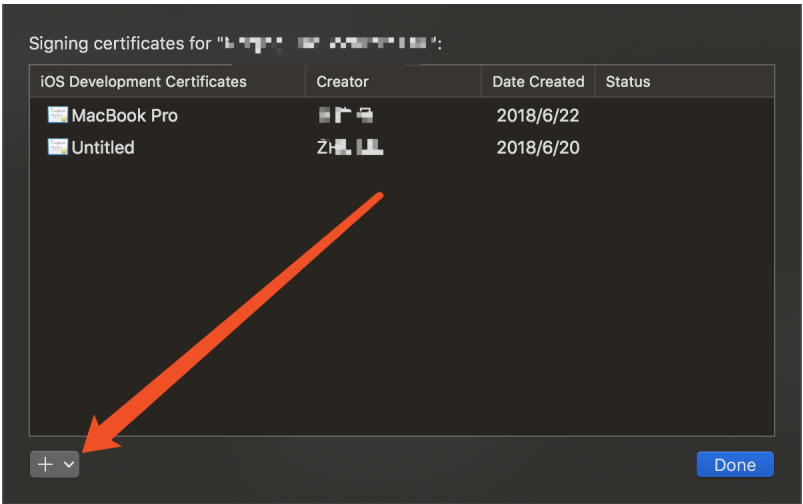





ps2

1.iOS Distribution21iOS Distribution

2.Xcode

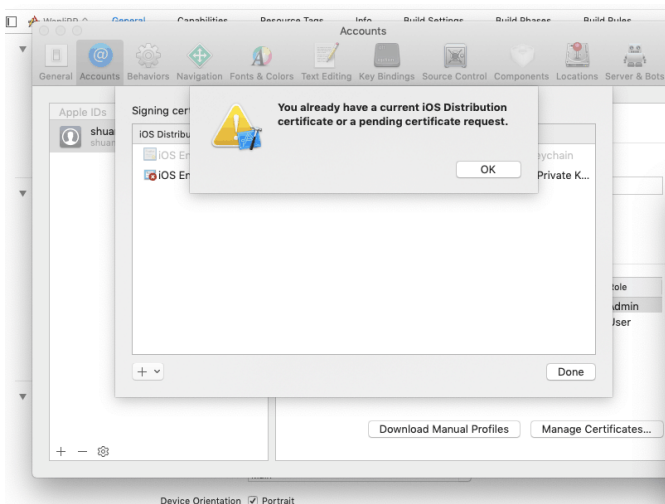


7.Mac

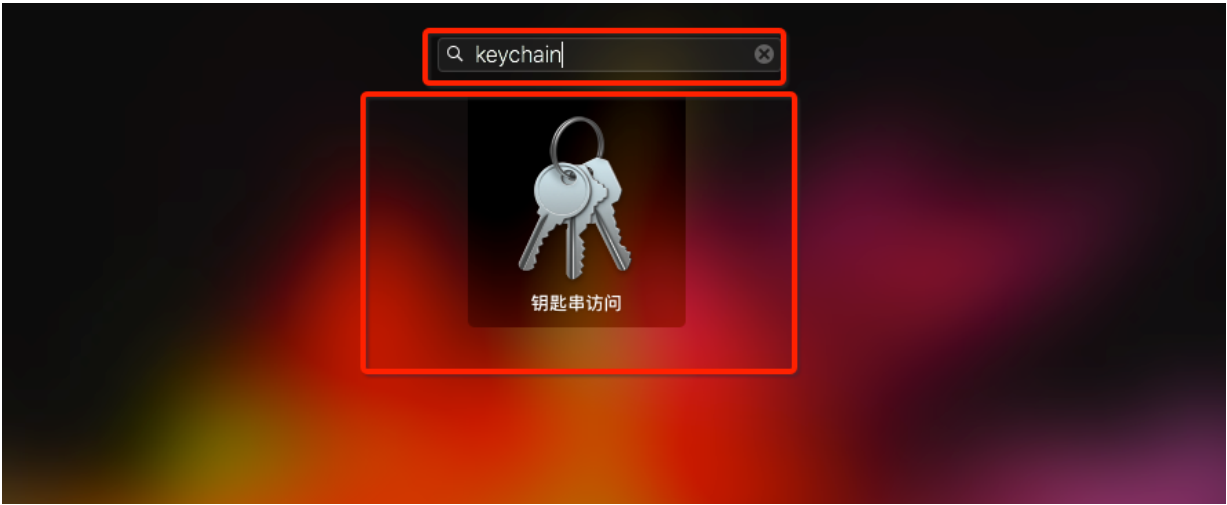

8.5

BobbyDistribution

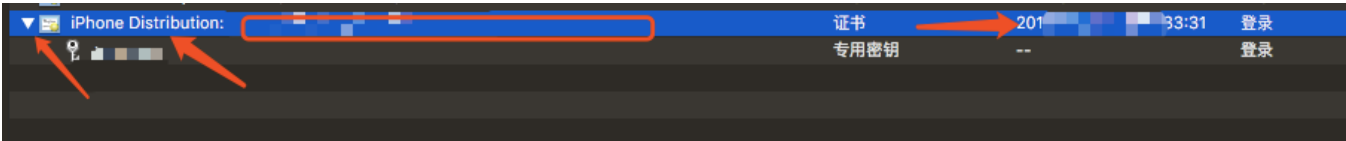

==:XXXXXXXXXX

.p12)

存储为: cert

标记:

位置: 下载

文件格式: 个人信息交换 (.p12)

取消

存储

9.

OEM

输入将用来保护输出项目的密码：

密码：

验证：

密码强度：弱

☐ 显示密码

取消 好

10.p12

p12 App OEM


0.12

App IDs“Push Notifications”

mobileprovisionmobileprovision

“Identifiers”“App IDs”IDmobileprovisionPush Notificationsedit

1.provisioning profilesproduction

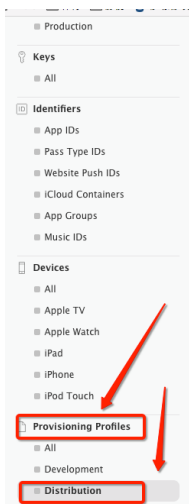

2.app


- manually generate profiles
- In house Distribution provisioning profile2

- AppXCappcom.xxx.xxx
- 1477
-

3.

- 1.
2. statusActive
3. Enable CapabilityPush Notification
4. TypeiOS UniversalDistribution

- Edit
- Download

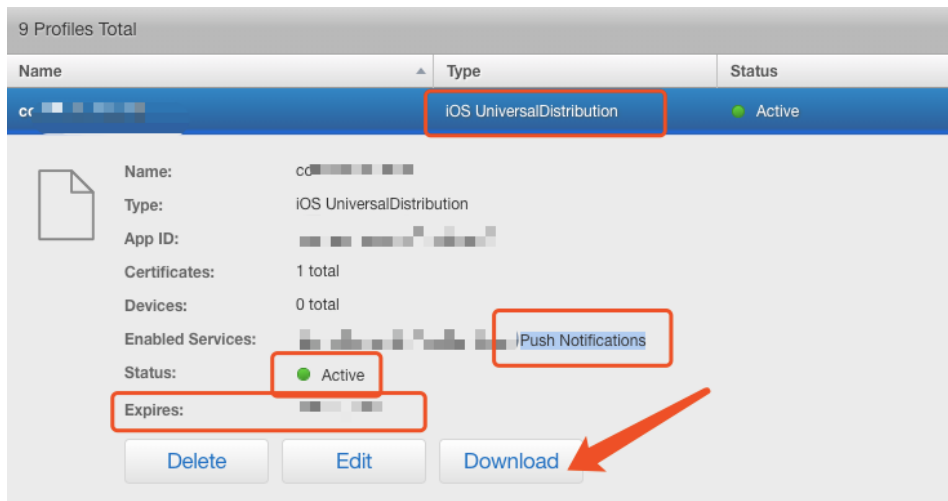

provisioning profile p12
Edit

4.mobileprovision

mobileprovision App OEM

QA

<https://developer.apple.com/cn/support/certificates/>