

Q&A



Q: IDEidea?

A: idea, IDE, eclipse, myeclipse, .

Q: ideaCommunityUltimate?

A: idea, , , Ultimate.

Q:

A:

Q: , ClassNotFoundException, , .

A: libjar. [jar](#), , , .

\$workdir/env/WebReport/WEB-INF/classes

Q: Usage: ASCII85InputStream filename

A: , designer.java

Q: jdk?

A: 1.8, .

Q: build.xmlplugin.version

A: .

Q:

A: FineReport.exe, , , , .

: FR-Plugin-Jar_Expired Jar, plugin.xmljartime.

Q:

A: JDKjdk



Q: jar, , ClassNotFoundException, MethodNotFound

A: WinRARjar, ClassNotFoundExceptionclass, jar, , rebuild.

Q: jar, API.

A: <http://dev.fanruan.com/javadoc>

Q: ideaant, ,

A: ant. ant -f build.xml jar, .

, , libjar.

jarlib, ;

IDEA / CODE (P) / frinereport / develop / midea / plugin-official / plugin-cluster / no

名称	修改日期	类型	大小
 fr-chart-8.0.jar	2016/8/30/星期...	Executable Jar File	1,258 KB
 fr-core-8.0.jar	2016/8/30/星期...	Executable Jar File	5,191 KB
 fr-designer-chart-8.0.jar	2016/8/30/星期...	Executable Jar File	1,205 KB
 fr-designer-core-8.0.jar	2016/8/30/星期...	Executable Jar File	5,649 KB
 fr-designer-report-8.0.jar	2016/8/30/星期...	Executable Jar File	1,996 KB
 fr-performance-8.0.jar	2016/8/30/星期...	Executable Jar File	77 KB
 fr-platform-8.0.jar	2016/8/30/星期...	Executable Jar File	3,630 KB
 fr-report-8.0.jar	2016/8/30/星期...	Executable Jar File	3,642 KB
 fr-third-8.0.jar	2016/5/18/星期...	Executable Jar File	19,883 KB
 servlet-api.jar	2016/3/30/星期...	Executable Jar File	96 KB

Q: zip.

A: build.xml.. build.xml

编辑(E) 视图(V) 搜索(S) 文档(D) 工程(P) 工具(T) 浏览器(B) Zen Coding(Z) 窗口(W) 帮助(H)

U 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

```
<target name="zip">
  <property name="plugin-folder" value="fr-plugin-${plugin-name}-${plugin-version}"/>
  <echo message="-----zip files-----"/>
  <mkdir dir="${plugin-folder}"/>
  <copy todir="${plugin-folder}">
    <fileset dir=".">
      <include name="${plugin-jar}"/>
      <include name="plugin.xml"/>
    </fileset>
    <fileset dir="{libs}">
      <include name="*.jar"/>
      <include name="*.dll"/>
    </fileset>
  </copy>
  <zip destfile="${basedir}/${plugin-folder}.zip" basedir=".">
    <include name="${plugin-folder}/*.jar"/>
    <include name="${plugin-folder}/*.dll"/>
  </zip>
</target>
```

将第三方包打入插件

Web:

Q: fs, ,

A: finedb, WebReport, fs-.

Q: fs

A: , , .

Q: webjs

A: JavaScript

Q: fs, ClassNotFoundException: com.fr.plugin.chart.xxxx

A: , .

QSVG

A<https://www.zhihu.com/question/25952487>


Q

A



Q:, .

A: , Designer. designer_chartdesigner_formdesigner_base.

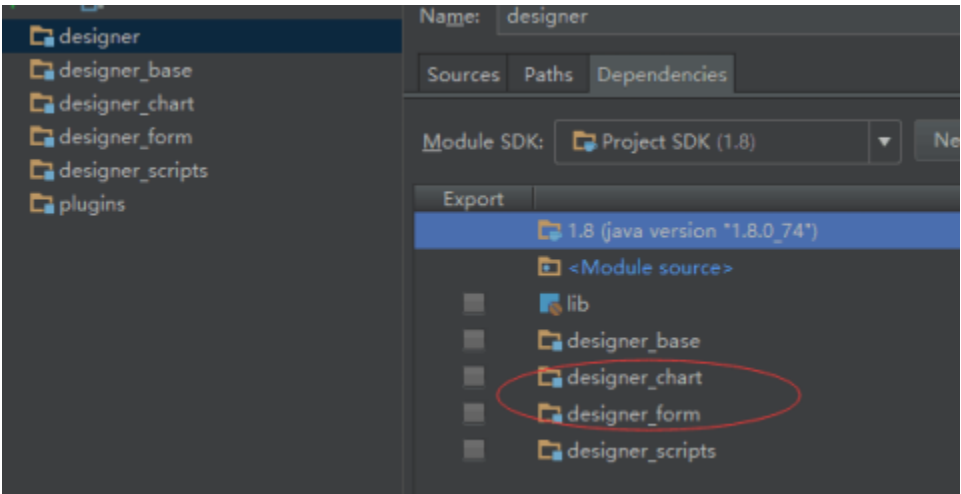

Q: .


A: ? .

Q: .

A: plugin.xmlUTF-8(, UTF-8+BOM, EditPlusUTF-8), JarTime.

Q: , .

A: jdk1.8, 1.8.

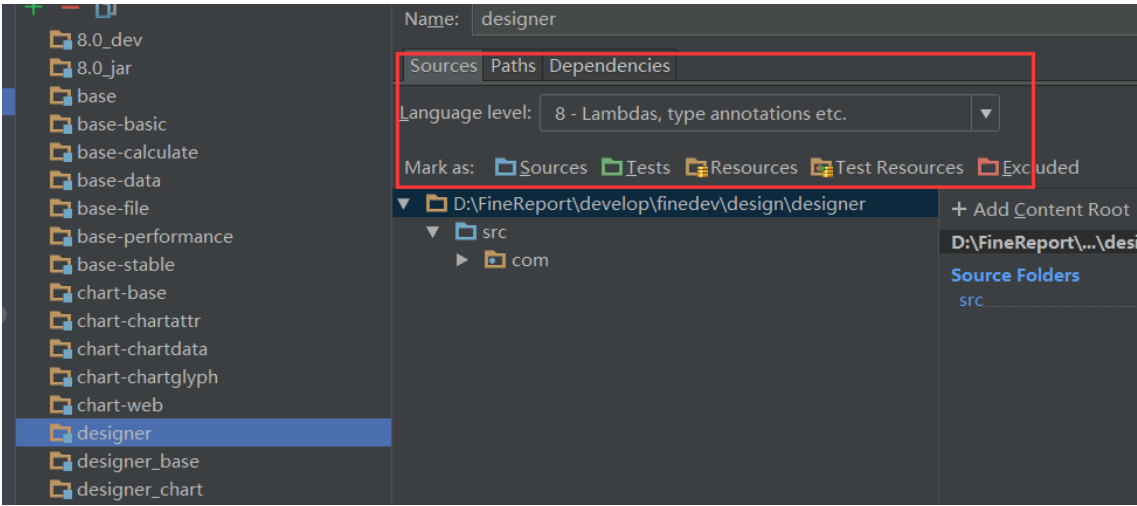

Q:.

A: